


DBT Deck Board Tie

THE DBT DECK BOARD TIE PROVIDES A NAIL FREE SURFACE FASTENING SYSTEM FOR DECK BOARDS.


Designed for use with 35mm thick decking timber. Using the DBT Eliminates:

- Countersinking
- Hammer dents
- Nail popping
- Water puddling
- Ugly nail heads
- Rust stains on the surface

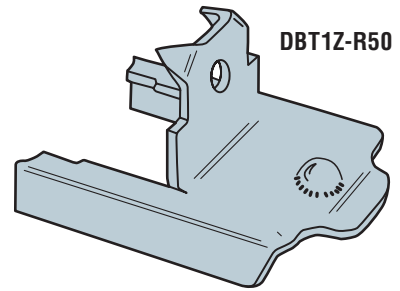

INSTALLATION:

Position the DBT with the locator prongs and install with a single 3.75 x 30mm square twist nail. Using dry timber will minimise deck board movement after installation.

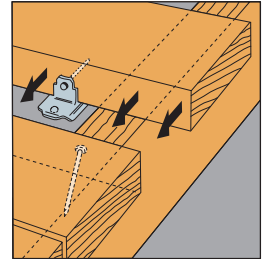

Typical DBT Installation


MATERIAL:

1.2mm mild steel. Pre-galvanised finish.

SPWG Square Plate Washers

MATERIAL:

Pre-galvanised mild steel.

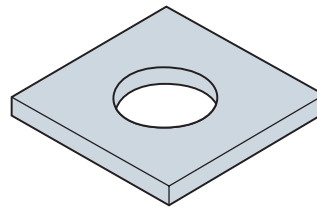

SPWG
Square Plate Washer


Model No	Dimensions (mm)	Bolt Size
SPWG	50 x 50 x 2.5	M12

MP Mending Plate

EASY TO USE CONNECTOR FOR TIMBER SPLICES, NO NAILS REQUIRED. FOR NON-STRUCTURAL APPLICATIONS ONLY; NOT FOR TRUSS APPLICATIONS.


MATERIAL:

1.0mm Pre-galvanised mild steel.

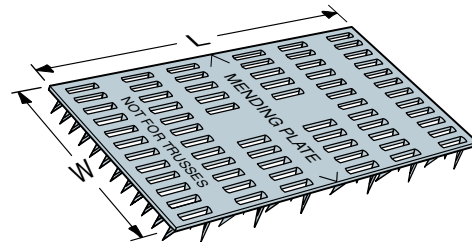

Model No	Dimensions	
	Width (mm)	Length (mm)
MP14	25	100
MP24	50	100
MP36	75	150

MP Installed

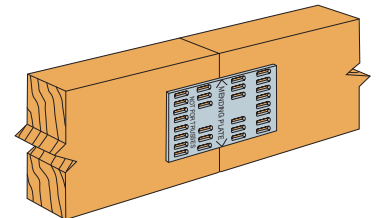

HI Scrolled Hip Iron

MATERIAL:

Mild steel.

FINISH:

Hot-dip galvanised.

Model No	Material Thickness
HI3	3mm
HI4	4mm
HI5	5mm

