

Technical Sheet

CNAPC34

34° Connector Nail, Paper Strip

The CNA nails are recommended for structural assemblies and to use with Simpson Strong-Tie connectors. The paper collated nail reduce the time for installation.

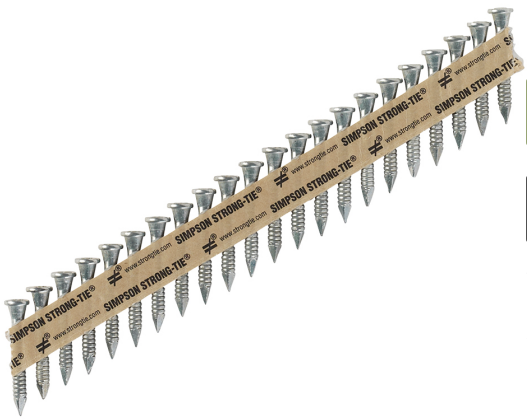









Features

Matière

- Steel (class 005 Standard EN10016) - electrogalvanised coating

Features:

- The conical shape under the head ensures that the nail is fully in contact
- with the hole
- High withdrawal capacity
- Annular ring thread
- Paper strip 34°

Applications

Support

- **Supporting / Supported member:** solid wood, composite lumber, glued-laminated wood.


Application:


- Connectors to wood

Technical Sheet

CNAPC34
34° Connector Nail, Paper Strip

Technical Data





Product dimensions and capacities

Reference	Fasteners Dimensions[mm]							
	Other			Product Dimensions[mm]				QD information
	Tun / DB nr.	NOB nr.	Qty/box	d[mm]	l[mm]	dh[mm]	ht[mm]	Qty per Strip
CNA4.0X35PC34	1897085	51561493	1500.0	4	35	7	1.5	22.0
CNA4.0X50PC34	1897087	51561512	1000.0	4	50	7	1.5	22.0
CNA4.0X60PC34	1897088	51561523	1000.0	4	60	7	1.5	22.0

Capacities are for 2mm thick steel plates and Grade C24 timber. Please refer to ETA-04/0013 for capacities of other thickness and timber grades

Winchester Road Cardinal Point Tamworth
Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616
Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®