
Technical Sheet

DWFSD
DRYWALL to Steel Screw

DWFSD is a self drilling screw with a fine thread, designed to fix drywall panels to steel of thicknesses 1.2 mm to 2.2 mm.





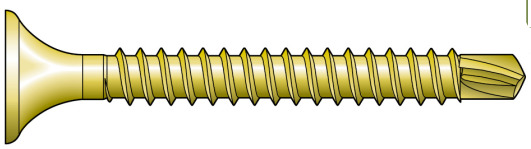



Features

Material

- Steel - yellow zinc plated

Benefits

- CE marked to EN14566
- Bugle haed
- Drill point
- Fine thread
- PH2 driver bits included (BIT2PE)

Applications

Support

- Suitable for fixing to 1.2 - 2.2 mm steel


Common Applications

- Fixing drywall board to steel

Technical Sheet

DWFSD
DRYWALL to Steel Screw

Technical Data



Product Dimensions UK

Reference	Fasteners Dimensions							
	Product Dimensions[mm]			QD information			Other	
	Ø Head[mm]	Thread diameter[mm]	l[mm]	Screws qty per strip	Max. rotation speed[tr/min]	Compatible device	Screws qty per box	Weight[kg]
DWFSD32PE	8.2	3.5	32	30.0	2500	QDPRO51E / QD76KE	2500.0	0.002
DWFSD41PE	8.2	3.5	41	30.0	2500	QDPRO51E / QD76KE	2500.0	0.003

DWFSD
DRYWALL to Steel Screw

Options





Fine Thread



Drill Point

Winchester Road Cardinal Point Tamworth Staffordshire
B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616
Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®