
Technical Sheet

A35E
Framing Anchors

The A35E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.
• Balanced, completely reversible design allows the A35E to be used to secure a wide variety of connections.

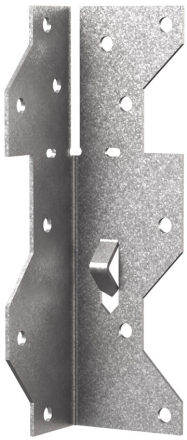

Features

Material

- Pre-galvanised mild steel.


Benefits


- Speed prong holds framing anchor in position to allow easier nailing,
- Exclusive bending slots allow instant, accurate bending on site for all two and three-way ties.
- Balanced, completely reversible design allows the A35 to be used for a wide variety of connections.

Applications

Suitable On

- Wood to wood applications.

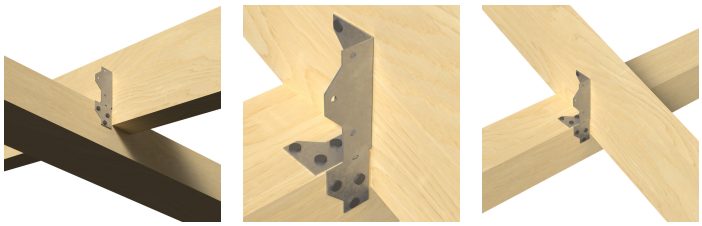


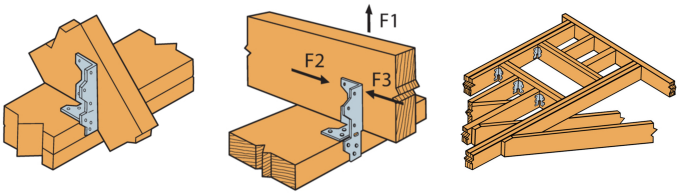


A35


A35


A35

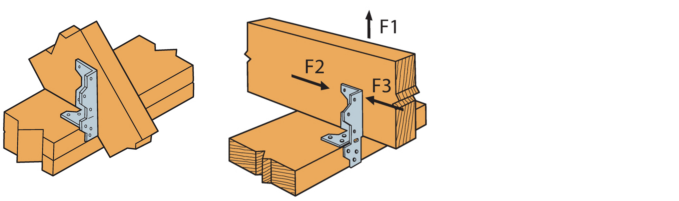



Technical Sheet

A35E
Framing Anchors

Technical Data


Product Dimensions






Reference	Connector Dimensions						
	Product Dimensions[mm]				Joist	Flange B	Other
	A[mm]	B[mm]	C[mm]	t[mm]	Round Ø3.8	Round Ø3.8	Weight[kg]
A35E	33	33	114	1.2	6	6	0.07

Connection Type 2



Reference	Connector Dimensions	Ties capacity		
	Other	Product Characteristic capacities - Timber to timber - Full nailing		Product characteristic capacities - Timber C24[kN]
	Installation Type	Number of Fasteners		$R_{2,k}$
		Joist	Flange B	N3.75x30
		N3.75x30	N3.75x30	
A35E (Install 2)	2	6	6	-

Connection Type 3



Reference	Connector Dimensions	Ties capacity		
	Other	Product Characteristic capacities - Timber to timber - Full nailing		Product characteristic capacities - Timber C24[kN]
	Installation Type	Number of Fasteners		$R_{2,k}$
		Joist	Flange B	N3.75x30
		N3.75x30	N3.75x30	
A35E (Install 3)	3	6	3	5.3

(3) Based upon 2 No brackets installed diagonally opposite to each other

Connection Type 4

Reference	Connector Dimensions	Ties capacity		
	Other	Product Characteristic capacities - Timber to timber - Full nailing		Product characteristic capacities - Timber C24[kN]
	Installation Type	Number of Fasteners		$R_{2,k}$
		Joist	Flange B	N3.75x30
		N3.75x30	N3.75x30	
A35E (Install 4)	4	6	6	5.3

(3) Based upon 2 No brackets installed diagonally opposite to each other


Installation


Fixing


Install with 3.75X30mm square twist nails.


Installation


Use all specified fasteners














Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®