

A35E Framing Anchors

The A35E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.

- *Balanced, completely reversible design allows the A35E to be used to secure a wide variety of connections.*

Features

Material

- Pre-galvanised mild steel.





Benefits

- Speed prong holds framing anchor in position to allow easier nailing,
- Exclusive bending slots allow instant, accurate bending on site for all two and three-way ties.
- Balanced, completely reversible design allows the A35 to be used for a wide variety of connections.

Applications

Suitable On

- Wood to wood applications.

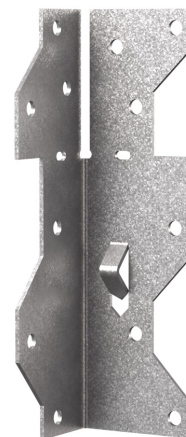



A35



A35





A35



A35E
Framing Anchors


Technical Data

Product Dimensions




Reference	Connector Dimensions						
	Product Dimensions[mm]				Joist	Flange B	Other
	A[mm]	B[mm]	C[mm]	t[mm]	Round	Round	Weight[kg]
					Ø3.8	Ø3.8	
A35E	33	33	114	1.2	6	6	0.07

Connection Type 2



Reference	Connector Dimensions	Connection Type 2				[kN]
	Other	Designation	Designation	Designation	Designation	
		Number of Fasteners	R2,k	Long Term	Medium Term	

Connection Type 3



Reference	Connector Dimensions	Connection Type 3				[kN]
	Other	Designation	Designation	Designation	Designation	
		Number of Fasteners	R2,k	Long Term	Medium Term	

A35E
Framing Anchors

Connection Type 4

Reference	Connector Dimensions	Ties capacity												
	Other	Product	Product											
	Installation Type													
A35E	Other													

Installation

Fixing

Install with 3.75X30mm square twist nails.

Installation

Use all specified fasteners

