


Technical Sheet

SIMPSON
Strong-Tie

WST Wall Starter Tie

Screw in wall starter with nylon wall plug, WST provides lateral stability to brickwork or blockwork walls. Can be installed horizontally or at a 30° angle to the mortar joint.

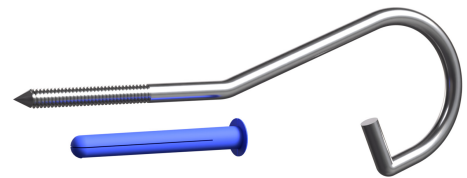

Technical Sheet

SIMPSON**Strong-Tie®**

WST
Wall Starter Tie

Technical Data

WST Product Dimensions

Reference	Connector Dimensions		
	Product Dimensions[mm]		
	Tie Length[mm]	T _i [mm]	t[mm]
WST135	135	38	Ø5

WST Performance Values

Reference	Masonry capacity			
	Characteristic Capacity[N]			
	Tension		Shear	
	Ultimate Declared Tensile Strength[N]	Tensile Strength: 1mm Serviceability[N]	Ultimate Declared Shear Strength[N]	Shear Strength: 1mm Serviceability[N]
WST135	1560	1450	1860	940

Winchester Road Cardinal Point Tamworth Staffordshire B78
3HG
tel: +44 1827 255600
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®

Information presented on this document is the exclusive property of Simpson

Strong-Tie®

WST
Wall Starter
Tie



www.strongtie.co.uk

SIMPSON**Strong-Tie®**

2006-10